DINGS'

Precision Motion Specialist

CORELESS PUSH ROD ACTUATOR

PRODUCT CATALOG

Jiangsu DINGS' Intelligent Control Technology Co., Ltd.



dingsmotion.com



Founded in 2008, Jiangsu DINGS' Intelligent Control Technology Co., Ltd. is guided by the philosophy, **"Quality stems from responsibility, and details determine success."**

As a global leader in precision linear motion, DINGS' delivers a comprehensive portfolio of precision stepper, DC and BLDC motors, voice coil motors, lead and ball screw linear actuators, PMSM motors for eco-mobility, and advanced motion controllers — setting new benchmarks in the global motion control market.

SCALE

300+	Advanced Machining Equipment	
40+	Automated Assembly Lines	
100+	Precision Testing & Analysis Systems	
140+	Patents & Intellectual Properties	

GROWTH

2008	Company Founded & DINGS' Brand Established
2010	DINGS' Motion USA Established
2016	DINGS' Korea Established
2019	Joined LEILI Group
2021	Changzhou Intelligent Manufacturing Plant Established Listed on China NEEQ Market
2022	Korea R&D Center Established
2023	Listed on Beijing Stock Exchange [Stock Code: 920593] DINGS' Korea Converted to Corporate Entity DINGS' Japan Established
2024	New Headquarters & Plant Established DINGS' Motion Europe Established
2025	Thailand Manufacturing Facility Established
2026	DINGS' Motion Europe Austria Branch Established

CERTIFICATIONS

- ISO 9001 — Quality
- ISO 14001 — Environmental
- ISO 45001 — Health & Safety
- ISO 13485 — Medical Device Quality
- ISO/IEC 17025 — Laboratory Accreditation
- IATF16949 — Automotive Quality
- IPMS — Intellectual Property
- CE — Safety Standards
- RoHS COMPLIANT — Environmental Standards - RoHS
- REACH NPS — Environmental Standards - REACH

PRODUCT WARRANTY

Warranty period: 1 year from shipment.

Free repair is provided for defects in materials or workmanship under normal use.

Warranty does not apply to:

- Warranty expiration or damaged/lost nameplates
- Improper installation or operating conditions
- Unauthorized disassembly or modification
- Repairs conducted outside of official service channels
- Force majeure, including natural disasters

DINGS' is committed to quality, reliability, and responsibility
— delivering high-performance motion solutions built on precision engineering.


Content

CORELESS PUSH ROD ACTUATOR

Part number construction	4
8 mm	5
10 mm	6
12 mm	7
16 mm	8
22 mm	9



Part Number Construction

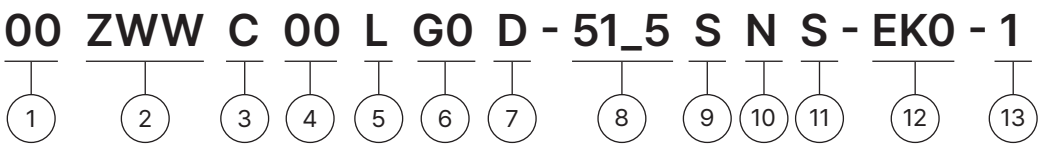

① Motor Size

Motor Size (mm)	8	10	12	16	22

② Product Name

ZWW = Coreless Brushless DC Motor

③ Motor Shape

C = Circular Type

④ Motor Length

Unit : mm

When the length involves decimal points, use "_" instead

⑤ Motor Casing

L = Aluminum

T = Stainless steel / Iron

⑥ Gear Ratio

00 = Gear Ratio

⑦ Lead Screw Code

Please refer to lead screw code selection table

⑧ Effective Stroke Length

⑨ Screw Surface Treatment

S = Standard (No teflon coating)

⑩ End Machining

C = Customize

N = None

⑪ Nut Style

S = Standard flange nut

⑫ Encoder


0 = Resolution

⑬ Customer Serial Number

Example

Part Number	10ZWWC25L-G18AB-16SNS-EK1024-001
Description	Motor diameter 10 mm Coreless Brushless DC Motor Motor length 25 mm Aluminum housing Gear ratio 1:18 AB lead Effective stroke 16 mm Customization: None Encoder resolution: 1024 Custom serial number: 001

8mm Series

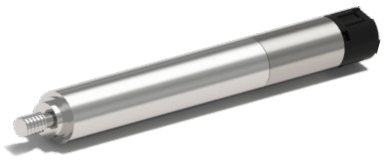


Motor Characteristics

Motor part number		8ZWWC20TEK
Motor size	mm	8
Rated voltage	V	12
Rated current	A	0.6
Lead	mm	0.5
Standard stroke (customizable)	mm	15
Maximum stroke	mm	20
Maximum speed	mm/s	6.25
Rated thrust	N	39
Peak thrust (short-time)	N	68
Duty type	-	S2
Gear ratio	-	16
Weight	g	16.8
Overall dimensions	mm	Φ8 × 71.6
Operating temperature	℃	−20 ~ +50
Repeatability	mm	±0.08
Encoder type	-	Incremental magnetic encoder
Number of channels	-	3
Encoder supply voltage	V	3.3
Resolution	-	1024

The above data is based on a gear ratio of 16:1

Dimensional Drawings

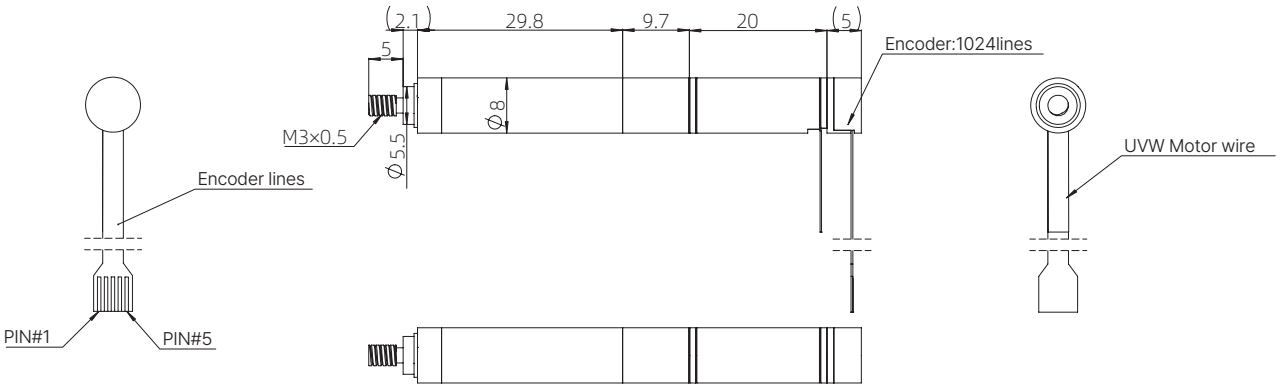

For customized options, please contact DINGS' or your local distributor

10mm Series




Motor Characteristics


Motor part number		10ZWWC25L
Motor size	mm	10
Rated voltage	V	12
Rated current	A	0.8
Lead	mm	1
Standard stroke (customizable)	mm	15
Maximum stroke	mm	25
Maximum speed	mm/s	28
Rated thrust	N	50
Peak thrust (short-time)	N	100
Duty type	-	S2
Gear ratio	-	4.25, 18
Weight	g	31.9
Overall dimensions	mm	Φ10 × 83.2
Operating temperature	℃	−20 ~ +50
Repeatability	mm	±0.08
Encoder type	-	Incremental magnetic encoder
Number of channels	-	3
Encoder supply voltage	V	3.3
Resolution	-	1024

The above data is based on a gear ratio of 18:1

Dimensional Drawings

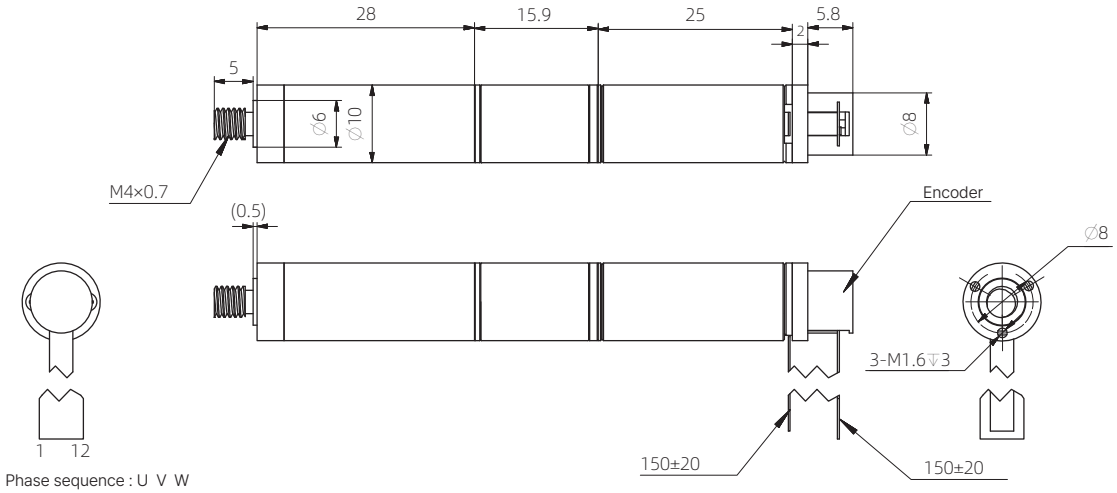

12mm Series

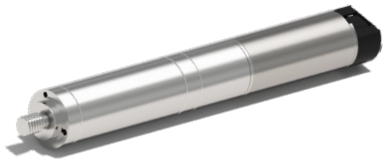


Motor Characteristics

Motor part number		12ZWWC29L
Motor size	mm	12
Rated voltage	V	12
Rated current	A	0.65
Lead	mm	1.27
Standard stroke (customizable)	mm	20
Maximum stroke	mm	30
Maximum speed	mm/s	14
Rated thrust	N	85
Peak thrust (short-time)	N	170
Duty type	-	S2
Gear ratio	-	4.25, 18
Weight	g	51.3
Overall dimensions	mm	Φ12 × 91.8
Operating temperature	℃	−20 ~ +50
Repeatability	mm	±0.08
Encoder type	-	Incremental magnetic encoder
Number of channels	-	3
Encoder supply voltage	V	3.3
Resolution	-	1024


The above data is based on a gear ratio of 18:1

Dimensional Drawings

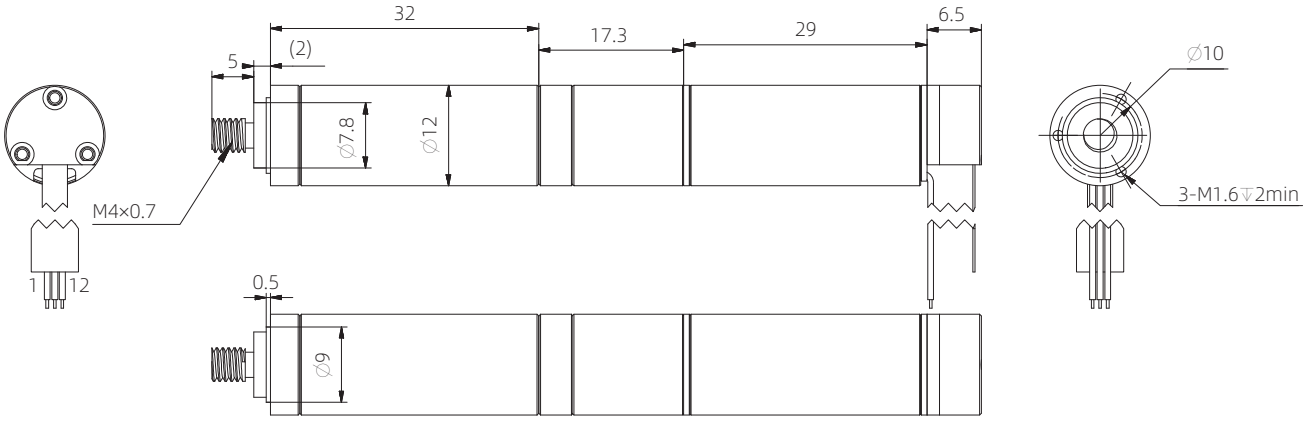

For customized options, please contact DINGS' or your local distributor

16mm Series

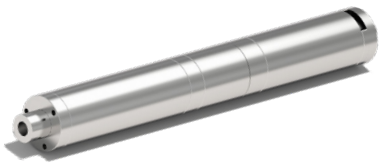


Motor Characteristics

Motor part number		16ZWWC40L
Motor size	mm	16
Rated voltage	V	12
Rated current	A	2.6
Lead	mm	1.27
Standard stroke (customizable)	mm	30
Maximum stroke	mm	40
Maximum speed	mm/s	20
Rated thrust	N	200
Peak thrust (short-time)	N	400
Duty type	-	S2
Gear ratio	-	5.3, 28
Weight	g	131.4
Overall dimensions	mm	Φ16 × 131.3
Operating temperature	℃	−20 ~ +50
Repeatability	mm	±0.08
Encoder type	-	Incremental magnetic encoder
Number of channels	-	3
Encoder supply voltage	V	5
Resolution	-	1024

The above data is based on a gear ratio of 28:1

Dimensional Drawings

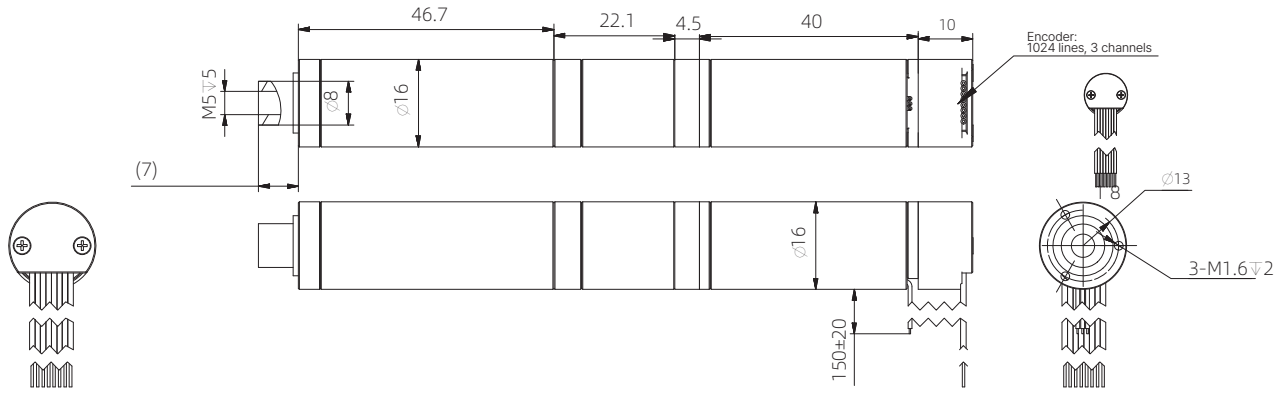

For customized options, please contact DINGS' or your local distributor

22mm Series




Motor Characteristics

Motor part number		22ZWWC48L
Motor size	mm	22
Rated voltage	V	24
Rated current	A	1.1
Lead	mm	1
Standard stroke (customizable)	mm	40
Maximum stroke	mm	50
Maximum speed	mm/s	5
Rated thrust	N	750
Peak thrust (short-time)	N	1500
Duty type	-	S2
Gear ratio	-	5.3, 26
Weight	g	318
Overall dimensions	mm	Φ22 × 168.9
Operating temperature	℃	−20 ~ +50
Repeatability	mm	±0.08
Encoder type	-	Incremental magnetic encoder
Number of channels	-	3
Encoder supply voltage	V	5
Resolution	-	1024

The above data is based on a gear ratio of 26:1

Dimensional Drawings

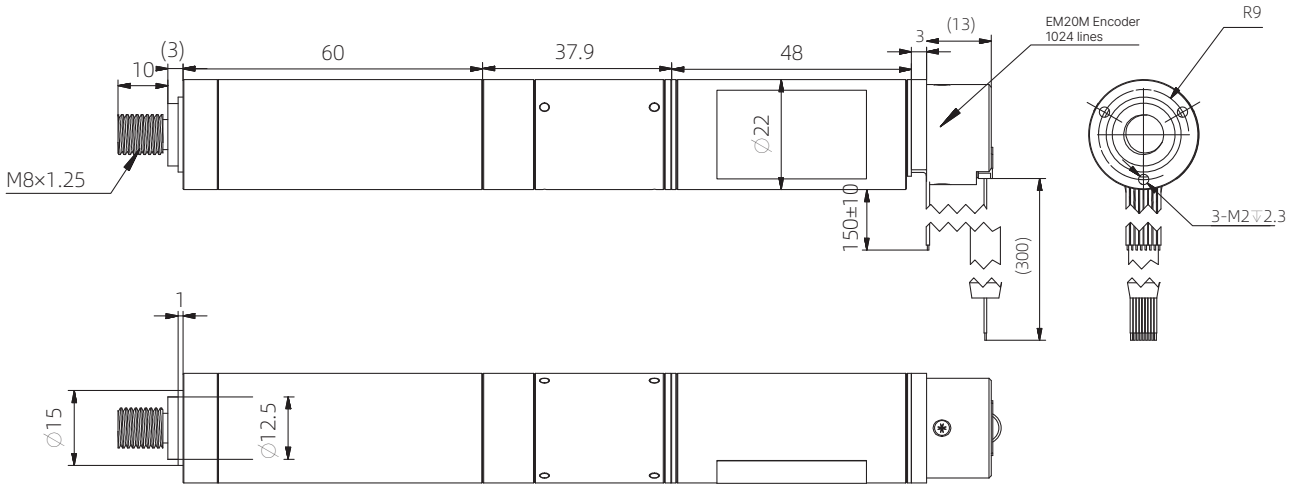

For customized options, please contact DINGS' or your local distributor

DINGS'
Precision Motion Specialist

ENG Web | Partners Web | YouTube

HEADQUARTERS

Jiangsu DINGS' Intelligent Control Technology Co., Ltd.

No. 2850 Luheng Road, Changzhou Economic Development Zone, Jiangsu Province, China

Tel : +86-519-85177825
E-mail : info@dingsmotion.com
Web : dingsmotion.cn

GLOBAL MANUFACTURING LOCATION

DINGS' Intelligent Control Technology (Thailand) Co., Ltd.

42/29 Moo 4, Uthai Subdistrict, Uthai District, Phra Nakhon Si Ayutthaya 13210, Thailand

Tel : +66 64-505-9951

SUBSIDIARIES

DINGS' Motion USA

355 Cochrane Circle Morgan Hill,
CA 95037

+1-408-612-4970
sales@dingsmotionusa.com
dingsmotionusa.com

DINGS' Motion Europe

4 Avenue du Grand Trémoutier
44120 Vertou, France

+33-(0)6-41-37-80-07
sebastien@dingsmotion.com
fr.dingsmotion.com

DINGS' Korea Co., Ltd.

C-702, 158 Haneulmaeul-ro, Ilsandong-gu,
Goyang-si, Republic of Korea

+82-31-994-0755
daniel@dingsmotion.com
dingsmotion.kr / dkps.co.kr / en.dkps.co.kr

INTERNATIONAL OFFICES

DINGS' Shenzhen Office

Room 1105, Block C, CIMC Industry Park,
Guangming District, Shenzhen, China

info@dingsmotion.com

DINGS' Motion Europe - Austria

Wilhelm-Weber-Weg 1/1/17,
1110 Vienna, Austria

+43-676-349-77-85
dusan@dingsmotion.com
dingsmotion.com

DINGS' Japan

101, 2-27-18, Nishi-kojiya, Ota-ku,
Tokyo 144-0034, Japan

+81-90-7730-0034
tsukahara@dingsmotion.com
jp.dingsmotion.com

Rev. 2026.10

© DINGS'. All rights reserved

No part of this catalog may be reproduced or distributed without prior written consent from DINGS'.
Specifications, features, and designs are subject to change without prior notice for product improvement.
DINGS' reserves the right of final interpretation of this catalog and its products.